

FINAL STEPS - VERIFY INSTALLATION

1. Power up the vending equipment and observe the display of the ePort Interactive.
2. Once the ePort Interactive unit has initialized, the display will read "Cash Sales Only" until the unit has acquired connectivity..
3. After the ePort Interactive is properly activated with USALive you can perform a test vend with a credit card.
4. Contact USAT Customer Care if you have any questions – 888.561.4748.

USA TECHNOLOGIES RMA (Return Merchandise Authorization) Procedure

Should you have technical problems with any USA Technologies parts, please call Customer Care at 1.888.561.4748 so that we can send you our RMA Form to complete and submit. We can issue RMA numbers between 8 AM and 5:30PM Eastern, Monday through Friday.

You may also email us at customerservice@usatech.com. Please be sure to include the following in your email: part #, number of parts returning, and as much detail as possible about the problem you are experiencing. A Technical Support Representative will contact you.

All parts should be returned to the following address:

USA Technologies Inc.
Attn: RMA # XXXXX
3103 Phoenixville Pike
Malvern, PA 19355

Please do not return parts without a RMA number. This could cause a significant delay in having your parts examined.



3103 Phoenixville Pike
Malvern, PA 19355

USA TECHNOLOGIES CUSTOMER CARE

Contact USA Technologies Customer Care for technical support and to request additional parts, information, and pre-authorization forms.

Phone: 888.561.4748

FAX: 610.989.9695

Email: customersupport@usatech.com

Online Store: <http://store.usatech.com>

USA TECHNOLOGIES WEBSITE ADDRESSES

Customer Website Login
<http://usalive.usatech.com>

Company Site
<http://www.usatech.com>

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

#VSXUD0102100 REV-A

All contents Copyright © 2016
USA Technologies, Inc. All rights reserved.

USA Technologies ePort Interactive Quickstart Guide



Thank you for purchasing the ePort Interactive. Before you start, please read the instructions thoroughly, and then take a few moments to plan your installation. Pick a mounting spot that will allow for ease of access and will not interfere with any moving parts in your vending equipment.

You must have a signed ePort Connect Services Contract and bank account assigned to this device for it to be able to accept credit card transactions.

Please call USA Technologies' Customer Care at 1.888.561.4748, if you need activation documents.

EPORT INTERACTIVE KIT

Your ePort Interactive kit (#VSWUT00TS100) includes:

- 1 - ePort Interactive device (#VSWUS0102100)
- 1 - Flange Mount Plate (#V9XUE200018B)
- 1 - Hardware Mounting Kit (#VSXUK0102100)
- 1 - Magnetic Base Antenna (#VSWUS0102110)
- 1 - Drill Guide (#VSXUD0102110)
- 1 - DEX 'Y' Cable (#VSXUC0102100)
- 1 - MDB Cable (#VSXUS0102120)
- 1 - ePort Interactive Quickstart Guide (#VSXUD0102100)

FIGURE 1 (items not shown to scale)




ePort Interactive
(#VSWUS0102100)



Flange Mount Plate
(#V9XUE200018B)



Hardware Mounting Kit
(#VSXUK0102100)



Drill Guide
(#VSXUD0102110)



Base Antenna
(#VSWUS0102110)



MDB Cable
(#VSXUS0102120)



DEX "Y" Cable
(#VSXUC0102100)


EPORT INTERACTIVE INSTALLATION PROCEDURES

Installation procedure for machines with a second opening that supports a bill acceptor.

Please note: It's important that the second opening has threaded studs on the door that will support this type of installation. If it does not, then a door bracket with studs will be required.

1. Power down the vendor door and decide if the bill acceptor needs to be removed for better access
2. Attach the mounting plate to the door's studs using four of the supplied nuts. See Figure 2 for correct orientation.
3. Route the ePort Interactive cable and bolts through the opening in the door and the mounting plate and attach to the mounting plate with the remaining nuts as shown in Figure 2. If the reader needs to be spaced further off the door, please order a Spacer Kit (#VSWUK0302100).
4. Connect the small black connector of the MDB Cable with the single plug to the Reader's pigtail cable. The other end of the MDB Cable has two connectors, which are connected between the vendor and other payment devices.
5. Attach the MDB Cable's ground cable to the metal housing with a self-tapping screw or if possible to an existing attached ground cable inside the vendor.
6. If using the ePort Interactive to transfer DEX data, connect the DEX Cable to the DEX port on the vendor and to the serial connector on the ePort Interactive, otherwise leave this unplugged to prevent activation errors.
7. Connect the Magnetic Base Antenna with the MCX connector to the back of the Reader by pushing in the connector until it locks in place.
8. Mount the Magnetic Base Antenna inside the door as close to the front glass area of the vendor as possible for best reception. A common mounting spot is the upper inside of the door pointing down. Also, be sure to uncoil the antenna's cable for best reception.

FIGURE 2

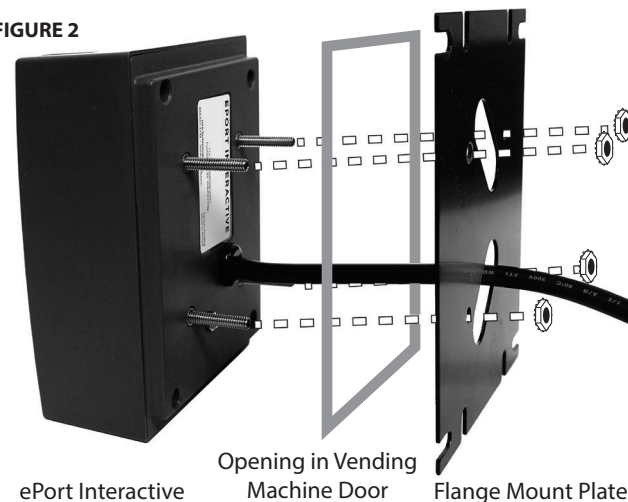

Installation procedure for machines without a second opening for a bill acceptor – you must mount the ePort Interactive on the outside surface of the vending machine:

1. Power down the vendor door.
2. Using a level, position and tape the Drill Guide on the front of the vendor door where the Reader will be installed.
3. Drill the four 3/16" holes for the mounting screws.
4. Drill the pilot holes for the cable holes using a 3/8" bit, then expand the hole to 5/8" using a drill or knockout punch.
5. Route the Reader cable through the upper 5/8" hole.
6. Push the Reader's studs through the four, 3/16" holes and attach to the door with four of the supplied nuts as shown in Figure 3.
7. Connect the small black connector of the MDB Cable with the single plug to the Reader's pigtail cable. The other end of the MDB Cable has two connectors, which are connected between the vendor and other payment devices.
8. Attach the MDB Cable's ground cable to the metal housing with a self-tapping screw or if possible to an existing attached ground cable inside the vendor.
9. If using the ePort Interactive to transfer DEX data, connect the DEX Cable to the DEX port on the vendor and to the serial connector on the Interactive, otherwise leave this unplugged to prevent activation errors.
10. Route the Magnetic Antenna cable through the lower 5/8" hole and attach to the Reader by pushing in the MCX connector until it locks in place.
11. Mount the Magnetic Base Antenna inside the door as close to the front glass area of the vendor as possible for best reception. A common mounting spot is the upper inside of the door pointing down. Also, be sure to uncoil the antenna's cable for best reception.

FIGURE 3

